

XiLog+

Data Logger with GPRS + SMS

XiLog+ series is a new range of remote data loggers available from Primayer. Every logger can be programmed for GPRS or SMS communications. It is available in single to nine channel models for use with a wide variety of sensors for monitoring water networks.

Features

- One, two, three and nine channel models
- High performance state-of-the-art below ground antenna
- Data transmission down to every 15 minutes (needs external power)
- Contact the logger as required
- Profile alarms with separately defined high and low profiles
- Wide range of sensors and high accuracy
- Powered for up to 5 years (depends upon configuration) + external battery and mains powered options
- Robust and waterproof to IP68
- SIM easily fitted on-site

Data Transfer

All loggers may be configured to use GPRS or SMS remote communications for periodic reporting. Transmission period can be set from 15 minutes to 24 hours. The state-of-the-art antenna enables *XiLog+* to operate from below ground in most locations. In areas of poor GSM/GPRS coverage an external antenna option is available.

Logging

Flexible logging memory and configuration;

- Memory size; 2 Gbyte
- Measurement interval; 1 second - 24 hour
- Logs at different intervals on same input
- Logs daily minimum, maximum and totals
- Event logging

*Data reporting,
graphing,
database and
export*



XiLog+Mini

For installation into smaller underground chambers the *XiLog+Mini* is available as both a single channel flow and single channel pressure logger. The *XiLog+Mini* has an external antenna.




XAP Display

Portable USB display for use with all *XiLog+* data loggers, provides on-site information.

- Current value for each channel
- Last minimum daily flow
- Sitename
- Logging interval
- Battery level

Applications

- Flow - district and zone monitoring, leakage detection, consumption monitoring
- Network modelling
- Pressure monitoring
- PRV performance
- Reservoir / bore-hole depth
- Level / flow conversion on open channel
- Rainfall
- Overflow detection

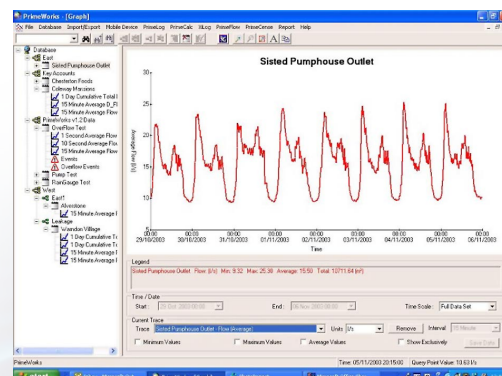

Primayer

Models	1F	1P	2	2i	3i	9
Bi-directional flow channels - uni-directional flow channels in ()	1(2)	-	1(2)	1(2)	1(2)	2(4)
Analogue channels	-	-	1	-	-	4 x Voltage, 3 x mA
Internal pressure channels	-	1	-	1	2	-

Flow

The flow input can log two uni-directional flows or one bi-directional flow. Also, both outputs from combination meters can be logged on one logger input channel. Existing meter index value can be entered at start of logging. Operation with, but not limited to, the following flowmeters:

Mechanical Meters	Pulse Unit Type
Elster	LRP, HRP, PR6, PR7, PSM
Sensus	R02.2, RD01, OPTO06, OD07
Actaris	Cyble 3-wire, Cyble 5-wire

Electro-Magnetic Meters
ABB, Khrono, Siemens, Isoil, E+H

Pressure/Depth/Analogue

Accuracy to $\pm 0.1\%$ (of full scale). The offset of the transducer is corrected by the *Auto Zero* facility.

XiLog+ 1P, 2i 3i have internal transducers.

XiLog+ 2 accepts a range of electrical inputs or external pressure or depth transducers for monitoring weirs, reservoirs, and boreholes.

Depth Transducers	0 - 0.35, 0 - 1 Bar (and above)
Pressure Transducers	0 - 1 to 0 - 25 Bar (and above)
Current Inputs	0 - 10, 4 - 20 mA
Voltage Inputs	0 - 1, 0 - 5, 0 - 10 V

XiLog+ 9 has multiple digital, voltage and current inputs for flexible use in multiple applications.



Events

- Rainfall - 0.1, 0.2, 0.5 mm/tip
- Overflow - time/period of tank or reservoir overflow

Alarms

Alarm to PC or mobile phone, features includes:

- Alarm exceeding threshold (+ deadband)
- Profile alarms (high/low profiles may be defined independently)
- Alarm on change-of-state



Communications

- Modem quad-band (850/900/1800/1900MHz)
- Below ground antenna or external antenna option
- Synchronise to GSM network (optional)
- GPRS to FTP using XiLog Message Service (XMS) or to end user FTP server
- SMS using XiLog Message Service (XMS) or direct to end user modem
- High speed local USB communications

Part Numbers	
<i>XiLog+ 1F</i>	NXG 201
<i>XiLog+ 1P</i>	NXG 202
<i>XiLog+ 2</i>	NXG 203
<i>XiLog+ 2i</i>	NXG 204
<i>XiLog+ 3i</i>	NXG 205
<i>XiLog+ 9</i>	NXG 301
<i>XiLog+Mini 1F</i>	NXG 501
<i>XiLog+Mini 1P</i>	NXG 502

Primayer Limited

Астана +7(7172)727-132 Волгоград (844)278-03-48 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89
 Казань (843)206-01-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Москва (495)268-04-70
 Нижний Новгород (831)429-08-12 Новосибирск (383)227-86-73 Ростов-на-Дону (863)308-18-15
 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Уфа (347)229-48-12
 Россия, Казахстан и другие страны ТС доставка в любой город
 единый адрес для всех регионов: pmi@nt-rt.ru
www.primayer.nt-rt.ru